

AC MOTOR STARTER

P/N: Q677

DESCRIPTION: INVERTER STARTER

NOMINAL POWER: 10 kVA

INPUT LINE: 220 V DC

OUTPUT LINE: THREE-PHASE 115V 60Hz

DIMENSIONS & MASS: WDH [mm] 300x350x580
(without resilient)
MAX 50 Kg

MAIN PROJECT STANDARDS REFERENCES:

- MIL-STD-810 (Environmental conditions)
- MIL-STD-461 (EMC) *
- MIL-STD-167-1 (Vibration)
- MIL-STD-740 (Noise) *
- MIL-S-901 (Shock) *

* Test performed by Certified Laboratory

COOLING SYSTEM: NATURAL AIR

IP GRADE: IP54


ELECTRIC INTERFACE: MIL CONNECTORS

SYSTEM (e.g.)

AC MOTOR STARTER FOR FUEL CELL COOLING SEAWATER
PUMPS AND FUEL CELL DISTILLATE WATER PUMP

APPLICATION FIELD: NAVAL DEFENCE

**KEY POINT: LOW AIRBORNE & STRUCTUREBORNE NOISE
EMC COMPLIANT**

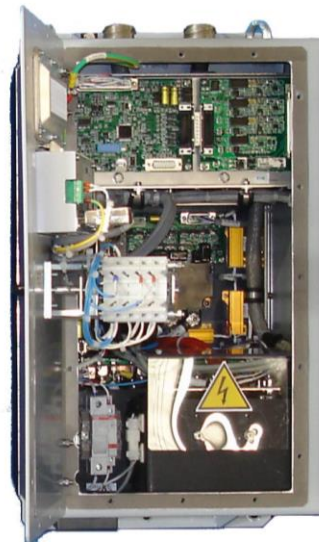

Eurocontrol S.p.A., società a socio unico

Via Luigi Cibrario, 4 - 16154 Genova | Tel. +39 010 42 25 11
info@eurocontrol-spa.com | www.eurocontrol-spa.com

